

STEP 1

Turn the table upside down carefully and place it on a soft surface to prevent scratches.

STEP 2

Locate the bolts (1) and washers (2) connecting the table legs to the table top (A).

STEP 3

Locate the bolts (3) connecting the table legs (B) to the table leg brace (C).

STEP 4

Using the L-key (4), loosen and remove all bolts securing each leg to the table.


STEP 5

After removing all the bolts, gently detach the table legs from the tabletop.


STEP 6

Store all bolts and base together in a safe place for future re-assembly.


A- x1

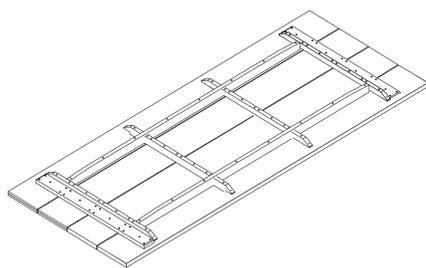

B- x1



C- x2

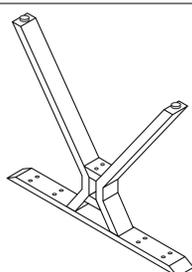

HARDWARE

①  x 16 (6 x 40 mm)

②  x 16 (6 x 18 x 2 mm)

③  x 4 (6 x 45 mm)

④  x 2 (4 mm)